




适用范围：

产品特点：

技术特点：

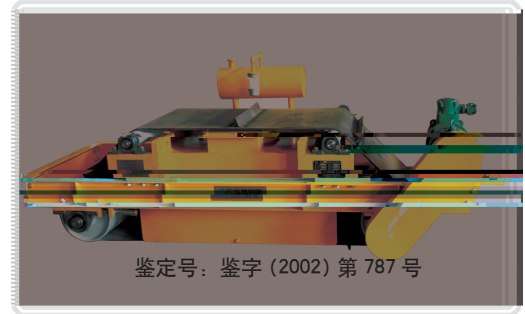

鉴定号：鉴字(2002)第787号



RCDF

参数 型号	项目 适应带宽 mm	额定吊高 h mm	磁场强度 ≥ mT	物料厚度 ≤ mm	励磁功率 ≤ kw	驱动功率 ≤ kw	适应带速 ≤ m/s	重量 kg	外形尺寸 mm				
									A	B	C	D	E
RCDF-5	500	150	60	100	1.2	1.5	4.5	1100	1980	1120	1020	650	1050
RCDF-6	600	175	60	130	1.8	1.5		1500	2140	1270	1070	700	1170
RCDF-6.5	650	200	70	150	2	2.2		1800	2270	1380	1080	750	1270
RCDF-8	800	250	70	200	3	2.2		2500	2650	1570	1100	810	1420
RCDF-10	1000	300	70	250	4.5	3		3550	2960	1620	1200	810	1580
RCDF-12	1200	350	70	300	6	4		4650	3250	1950	1300	940	1780
RCDF-14	1400	400	70	350	8.5	4		6290	3550	2190	1400	940	1950
RCDF-16	1600	450	70	400	12.5	5.5		7770	3650	2210	1250	940	2180
RCDF-18	1800	500	70	450	18	7.5		8900	3950	2400	1500	940	2315

RCDF-T

型号	项目 参数	适用 带宽 mm	额定 吊高 h mm	磁场 强度 ≈ mT	励磁 功率 ≤ KW	驱动电 机功率 kw	适用 带速 ≤ m/s	外形尺寸 mm	整机 重量 kg
RCDF-10	T1	1000	300	90	7.5				
	T2			120	12.5				
	T3			150	16.5				
RCDF-12	T1	1200	350	90	10.0				
	T2			120	14.0				
	T3			150	21.0				
RCDF-14	T1	1400	400	90	14.0				
	T2			120	18.0				
	T3			150	26.0				
RCDF-16	T1	1600	450	90	15.0				
	T2			120	22.0				
	T3			150	32.0				
RCDF-18	T1	1800	500	90	19.0				
	T2			120	28.0				
	T3			150	38.0				
RCDF-20	T1	2000	550	90	24.0				
	T2			120	32.0				
	T3			150	45.0				
RCDF-22	T1	2200	600	90	28.0				
	T2			120	36.0				
	T3			150	52.0				
RCDF-24	T1	2400	650	90	32.0				
	T2			120					
	T3			150					