
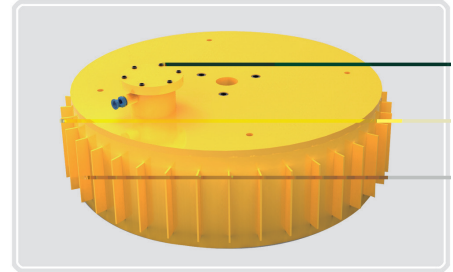



RCDB PDC

适用范围:

技术特点:



0.1-50

主要技术参数:

RCDB :

	mm	h mm	mT	mm	kw	m/s	kg	mm			
								A	B	D	d
RCDB-5	500	150	60	90	1	4.5	360	280	325	630	450
RCDB-6	600	175	60	120	1.6		480	280	325	740	500
RCDB-6.5	650	200	70	150	2		560	305	400	780	640
RCDB-8	800	250	70	200	3.6		800	310	400	960	780
RCDB-10	1000	300	70	250	5		1350	310	400	1300	920
RCDB-12	1200	350	70	300	6.8		2000	338	425	1500	1140
RCDB-14	1400	400	70	350	9		2500	336	440	1600	1200
RCDB-16	1600	450	70	400	13		4800	500	570	1850	1400
RCDB-18	1800	500	70	450	18		6100	530	610	2150	1800

RCDB-T :

		mm	mm	mT	kw	m/s	mm		kg
							Dx B		
RCDB-6.5	T1	650	200	90	4	5.8	960x 390		800
	T2			120	6		960x 480		1450
	T3			150	10		1000x 550		2120
RCDB-8	T1	800	250	90	5.3		1200x 400		1360
	T2			120	7.5		1200x 450		1920
	T3			150	11.5		1300x 520		2000
RCDB-10	T1	1000	300	90	7.1		1300x 450		2450
	T2			120	9		1300x 540		3010
	T3			150	14		1500x 560		2500
RCDB-12	T1	1200	350	90	9		1500x 480		3290
	T2			120	13.5	1500x 560		4100	
	T3			150	16	1600x 620		5300	
RCDB-14	T1	1400	400	90	11.5	1750x 580		3700	
	T2			120	18	1750x 700		5100	
	T3			150	25	1950x 880		6500	
RCDB-16	T1	1600	450	90	18	1900x 620		5800	
	T2			120	25	1950x 680		7100	
	T3			150	40	2000x 850		9320	
RCDB-18	T1	1800	500	90	25	2150x 920		7350	
	T2			120	32	2200x 1030		9200	
	T3			150	45	2200x 1030		13800	
RCDB-20	T1	2000	550	90	30	2200x 1030		8600	
	T2			120	40	2350x 1080		13500	
	T3			150	50	2650x 1320		17200	